

### JAPONISM DESIGN



### Features

- World's first, carbon film & metal film composite resistors
- "Sound of carbon film resistors" & "Temperature characteristics of metal film resistors" harmonized
- 24K gold plated OFC leads (no nickel ground)
- Non-magnetic cap made of brass is adopted to minimize magnetic distortion
- Suitable for both Digital and Analog audio equipment
- RoHS compliant

\* Patent pending


### Type Designation

AMRC 1/2W 100Ω G  
 ① ② ③ ④

①	Product name	AMRC	
②	Power rating	1/2W *1)	
③	Nominal resistance	E-24	
④	Resistance tolerance	G	±2%
		F	±1%


\*1) 1W or 2W will be followed

### Specifications

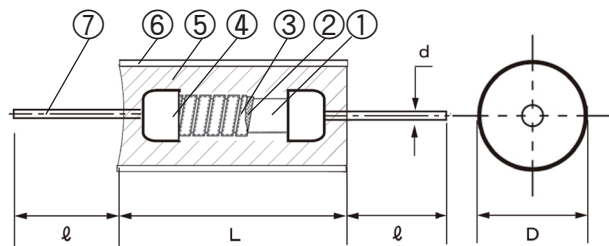

	Parts name	Description
①	Ceramic base	Porcelain rod (Alumina)
②	Resistor film (1st layer)	Carbon film
③	Resistor film (2nd layer)	Metal film
④	Cap	Brass (tin plated)
⑤	Potting	Epoxy resin and alumina
⑥	Outer case	Alumina
⑦	Lead wire	Gold(24K) plated OFC (no nickel ground)

### Derating Curve

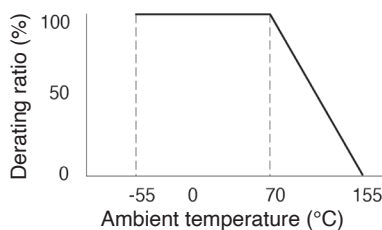

### Dimensions

Type	L	D	ℓ	d
AMRC 1/2W	9.0 ± 1.0	6.0 ± 0.5	≤ 25	0.6 ± 0.1

(mm)

### Rating

Type	Power Rating (W)	Max.Working Voltage (V)	Max.Overload Voltage (V)	Dielectric Withstanding Voltage (V)	Resistance Range(Ω)	Rated Ambient Temp. (°C)	Operating Temp. Range (°C)
AMRC 1/2W	0.5	350	700	700	22~1M	+70°C	-55~+155°C

Rated voltage shall be calculated by the formula of  $\sqrt{\text{Power rating}} \times (\text{Resistance value})$ , or Max. working voltage in this table, whichever is lower.

The maximum overload voltage shall be smaller one of either 2.5 times value of the rated voltage or the maximum overload voltage in this table.

• Specifications are subject to change without prior notice.  
 • ©2025 Amtrans Corporation. All rights reserved.